


## Lightsource Test Report

### Product Information

Product Type: KL-T1001AJ-C5-12W      Product Spec: 2000K  
Product Number:

### CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.5204$   $y=0.4156$      $u(u')=0.2997$   $v=0.3590$   $v'=0.5385$   
CCT:  $T_c=2093K$  ( $duv=0.00046$ )      Color Ratio:  $R=0.338$   $G=0.646$   $B=0.016$   
Peak Wavelength: 634nm      Half Bandwidth: 112.7nm  
Dominant Wavelength: 588.2nm      Color Purity: 0.810  
Color Render Index:  $R_a=91.6$ ,  $CRI=91.7$   
R1 =94    R2 =99    R3 =97    R4 =95    R5 =96    R6 =95    R7 =88    R8 =78  
R9 =62    R10=98    R11=99    R12=91    R13=96    R14=99    R15=88

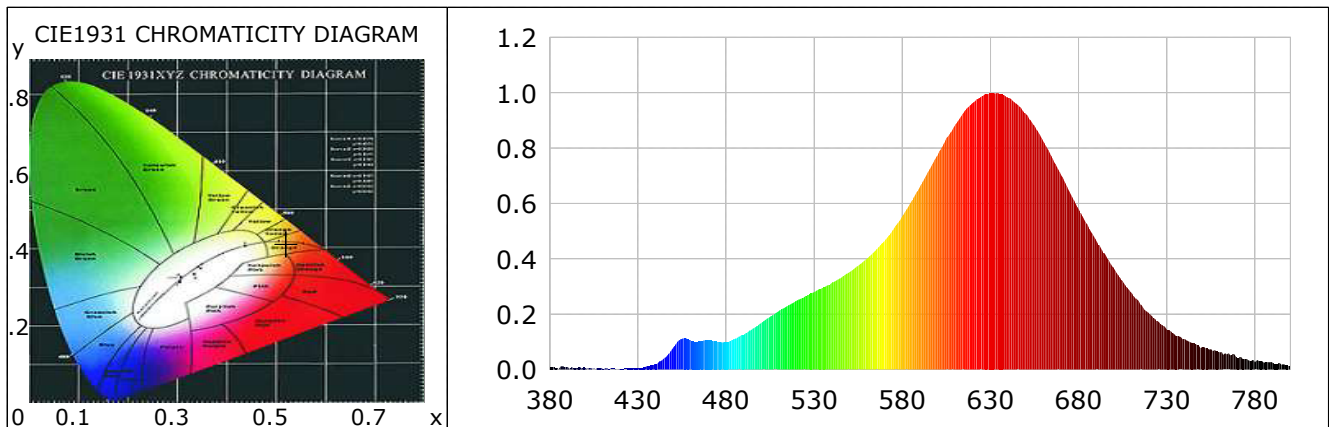

### Photometric Parameters

Luminous Flux: 471.54 lm      Efficiency: 78.33 lm/W      Radiant Power: 1.615 W

### Electric Parameters

Voltage: 24.00V      Current: 0.2508A      Power:6.02W  
Power Factor: 0.0000      Frequency: 0.00Hz

### Test Information

Scan Range: 380nm~800nm:1nm      Photometric Method: sphere-spectroradiometer  
Stabilization Time: 0 ms      Photometric Condition: Sphere diameter: 2.00m, 4π  
Max of Signal: 44407 (5297)      CCD Integration Time: 1758.45 ms


## Lightsource Test Report

### Product Information

Product Type: KL-T1001AJ-C5-12W      Product Spec: 4000K  
Product Number:

### CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.3988$   $y=0.3666$      $u(u')=0.2416$   $v=0.3332$   $v'=0.4998$   
CCT:  $T_c=4028K$  ( $duv=-0.00953$ )      Color Ratio:  $R=0.238$   $G=0.717$   $B=0.045$   
Peak Wavelength: 630nm      Half Bandwidth: 179.7nm  
Dominant Wavelength: 586.5nm      Color Purity: 0.297  
Color Render Index:  $R_a=93.8$ ,  $CRI=92.1$   
R1 =93    R2 =93    R3 =96    R4 =97    R5 =93    R6 =89    R7 =94    R8 =97  
R9 =93    R10=88    R11=94    R12=78    R13=92    R14=99    R15=93

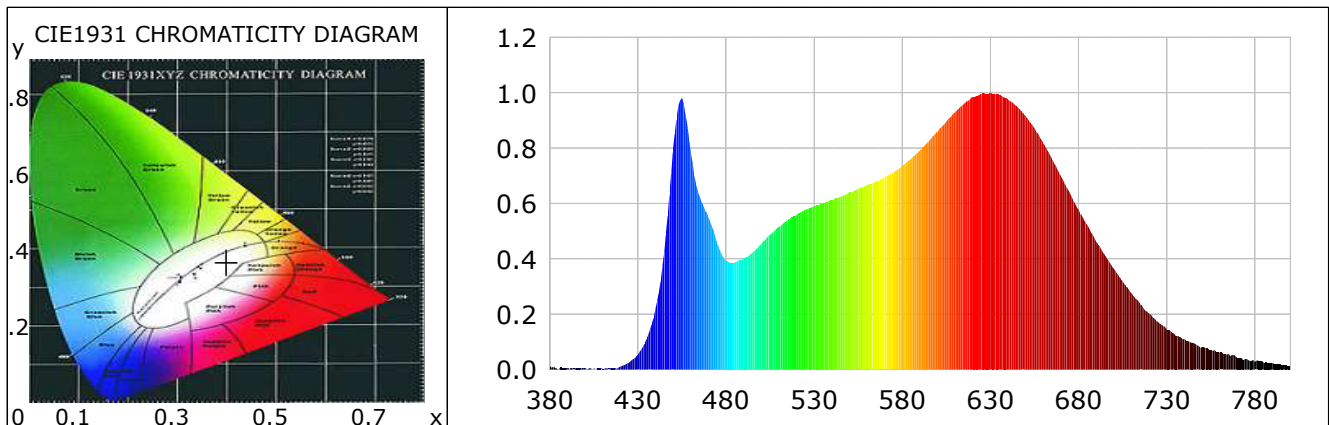

### Photometric Parameters

Luminous Flux: 1029.10 lm      Efficiency: 85.12 lm/W      Radiant Power: 3.788 W

### Electric Parameters

Voltage: 24.00V      Current: 0.5037A      Power: 12.09W  
Power Factor: 0.0000      Frequency: 0.00Hz

### Test Information

Scan Range: 380nm~800nm:1nm      Photometric Method: sphere-spectroradiometer  
Stabilization Time: 0 ms      Photometric Condition: Sphere diameter: 2.00m, 4π  
Max of Signal: 49990 (4926)      CCD Integration Time: 1211.54 ms

## Lightsource Test Report

### Product Information

Product Type: KL-T1001AJ-C5-12W      Product Spec: 6000K

Product Number:

### CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.3242$   $y=0.3370$      $u(u')=0.2027$   $v=0.3161$   $v'=0.4742$

CCT:  $T_c=6177K$  ( $duv=0.00169$ )

Color Ratio: R=0.162 G=0.773 B=0.066

Peak Wavelength: 455nm

Half Bandwidth: 25.3nm


Dominant Wavelength: 496.9nm

Color Purity: 0.029

Color Render Index: Ra= 93.2, CRI= 91.2

R1 =94    R2 =98    R3 =91    R4 =92    R5 =92    R6 =91    R7 =95    R8 =93

R9 =92    R10=91    R11=95    R12=60    R13=98    R14=94    R15=93

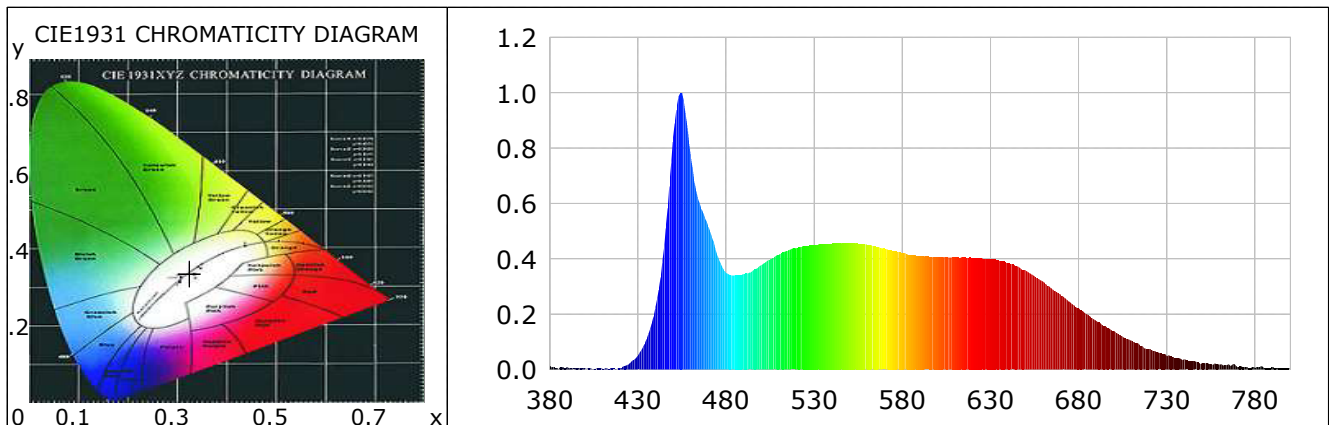

### Photometric Parameters

Luminous Flux: 537.19 lm

Efficiency: 87.92 lm/W

Radiant Power: 2.031 W

### Electric Parameters

Voltage: 24.00V

Current: 0.2545A

Power: 6.11W

Power Factor: 0.0000

Frequency: 0.00Hz

### Test Information

Scan Range: 380nm~800nm:1nm Photometric Method: sphere-spectroradiometer

Stabilization Time: 0 ms

Photometric Condition: Sphere diameter: 2.00m, 4π

Max of Signal: 45499 (4838)

CCD Integration Time: 1211.54 ms

Condition: Tx:0.0'C, Ti:0.0'C, R.H.:60%

Test Lab:

Operator:

Test Device: Inventfine CMS-2

Test Time: 2025-08-22 14:43:40

Inspector: